

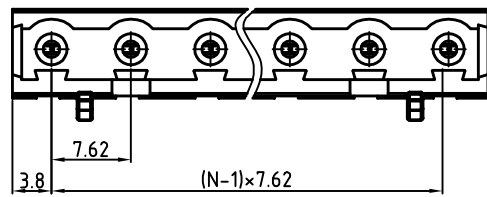


SIGN	DATE	DESCRIPTION	APPROVER
<b>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</b>			

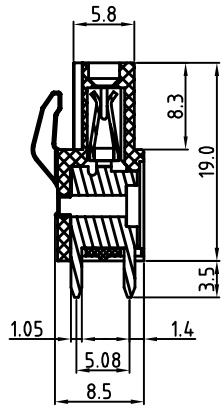

N=Number of poles

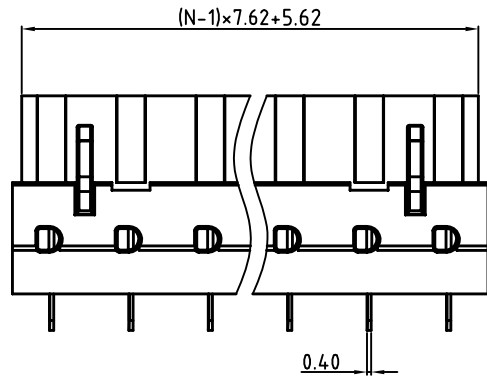

**Material**

- Wire guard: PhBz(CuSn)
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

**Electrical**

- Voltage rating: 300VAC
- Current rating: 20A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:


RoHS Compliant

PART NUMBER:

**OSTV7XX0150**

<p>No. of Poles</p> <p>02 2 Pole</p> <p>03 3 Pole</p> <p>... ..</p> <p>16 16 Pole</p>	<p>COLOR</p> <p>0: Black</p> <p>5: Green (Standard)</p> <p>6: Blue</p> <p>8: Light Grey</p>
---	---

**P.C.B LAYOUT**

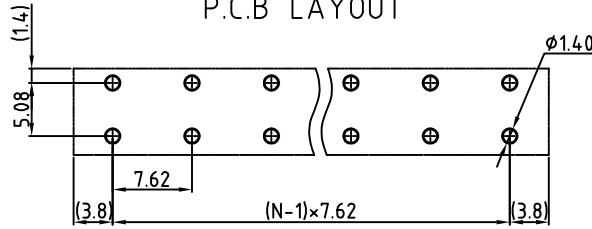

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTV7 7.62mm Series 180° Vertical 2p-16p			
PART NO.	OSTV7XX0150	DWG NO.	OSTV7XX0150.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.11.11	Shi Jun 2006.11.11	Tason 2006.08.04	Tason 2006.08.04		X. ±0.5 X.X ±0.3 X.XX ±0.1 X° ±1°
				SHEET: 01/01	UNIT: mm SCALE: 0.2500 REV: C