


NOTES:




1. MAX ALLOWABLE BOW: .005 INCH/INCH.
2. HEIGHT VARIATION BETWEEN ANY TWO PINS SHALL BE .010 MAX.
3. TERMINAL PUSHOUT FORCE: 2 lbs. MIN.
4. MAX PIN ROTATION IN BODY: 2°.
5. $\text{\textcircled{C}}$ REPRESENTS A CRITICAL DIMENSION.
6. FOR -S, -G & -L PLATING, GOLD WILL BE ON CONTACT AREA.
7. TUBE POSITIONS -07 THRU -50. POSITIONS -01 THRU -06 ARE TO BE LAYER PACKAGED.
8. MAX CUT FLASH: .010
9. FOR -D, USE DWM-50-D WHEN RAN ON BOARD STACKER AUTOMATION, HTMS-50-D FOR ALL OTHER PROCESSES. FOR -S, USE HTMS-50-S.
10. FOR ADDED MECHANICAL STABILITY, SAMTEC RECOMMENDS MECHANICAL BOARD SPACERS BE USED IN APPLICATIONS WITH GOLD OR SELECTIVE GOLD PLATED CONNECTORS. CONTACT IPG@SAMTEC.COM FOR MORE INFORMATION.

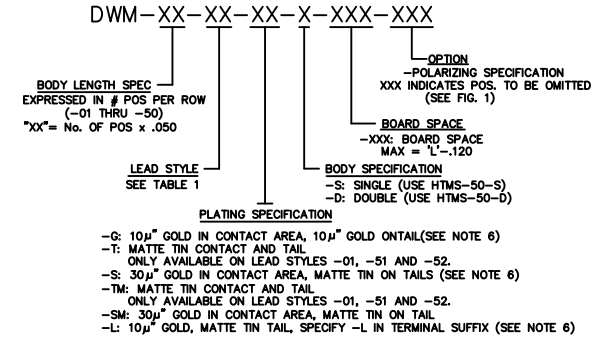

SEE NOTE 7

TABLE 1

LEAD STYLE	TERMINAL SPEC.	'L'	CONTACT AREA	L' - .120 [3.05] BOARD SPACE MAX (REF)	PACKAGING (7 POS MIN).			
					SINGLE ROW		DOUBLE ROW	
-01	T-1M6-18-XX-2	.450 [11.43]	.190 [4.83]	REF .330 [8.38]	PT-1-24-01-24	(2) TP-24	PT-1-24-01-22	(2) TP-03
-51	T-1M6-02-XX-2	.410 [10.41]	.140 [3.56]	REF .290 [7.37]	PT-1-24-01-24	(2) TP-24	PT-1-24-01-22	(2) TP-03
-52	T-1M6-12-XX-2	.425 [10.80]	.165 [4.19]	REF .305 [7.75]	PT-1-24-02-03	(2) TP-24	PT-1-24-02-53	(2) TP-09
-53	T-1M6-04-XX-2	.505 [12.83]	.190 [4.83]	REF .385 [8.78]	PT-1-24-02-03	(2) TP-24	PT-1-24-02-46	(2) TP-03
-54	T-1M6-14-XX-2	.555 [17.10]	.190 [4.83]	REF .435 [11.05]	PT-1-24-02-03	(2) TP-24	PT-1-24-06-29	(2) TP-03
-55	T-1M6-03-XX-2	.610 [15.49]	.190 [4.83]	REF .490 [12.45]	PT-1-24-02-03	(2) TP-24	PT-1-24-04-44	(2) TP-03
-56	T-1M6-13-XX-2	.625 [15.88]	.190 [4.83]	REF .505 [12.83]	PT-1-24-10-03	(2) TP-24	PT-TW002-S-SM	(2) TP-07
-57	T-1M6-19-XX-2	.650 [16.51]	.190 [4.83]	REF .530 [13.46]	PT-1-24-10-03	(2) TP-24	PT-FW004-OX-D-EX	(2) TP-24
-58	T-1M6-05-XX-2	.705 [17.91]	.190 [4.83]	REF .585 [14.86]	PT-1-24-10-03	(2) TP-24	PT-1-24-01-51	(2) TP-13
-59	T-1M6-15-XX-2	.755 [19.18]	.190 [4.83]	REF .635 [16.13]	PT-1-24-10-03	(2) TP-24	PT-FW004-OX-D-EX	(2) TP-24
-60	T-1M6-16-XX-2	.825 [20.96]	.190 [4.83]	REF .705 [17.91]	PT-1-24-10-03	(2) TP-24	PT-1-24-01-71	(2) TP-03
-61	T-1M6-28-XX-2	1.050 [26.67]	.190 [4.83]	REF .930 [23.62]	PT-1-24-02-04	(2) TP-33	PT-1-24-08-03	(2) TP-03

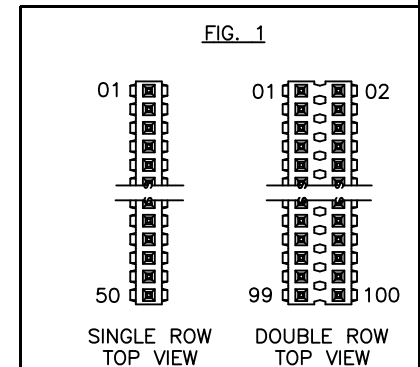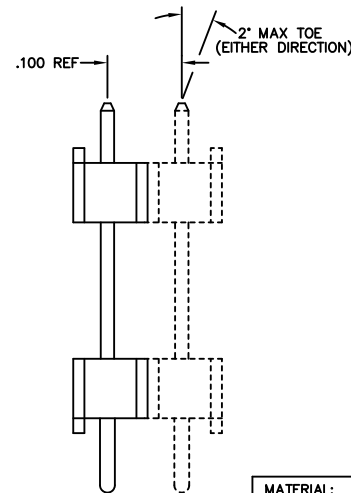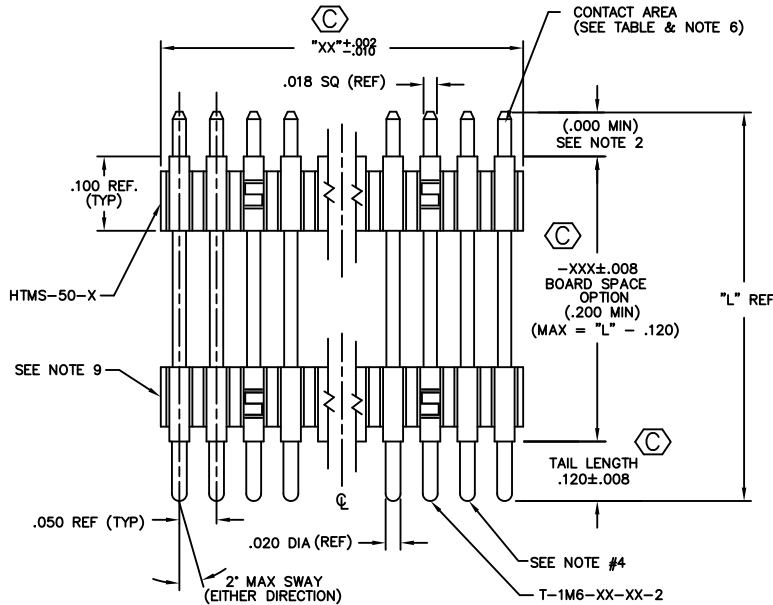

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL RIGHTS ARE RESERVED. NO PART OF THIS DOCUMENT MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM SAMTEC CORPORATION. SAMTEC CORPORATION IS NOT RESPONSIBLE FOR ANY DAMAGE TO PROPERTY OR PERSONS ARISING FROM THE USE OF THIS DOCUMENT.

MATERIAL:
INSULATOR:
BLACK LIQUID CRYSTAL POLYMER
UL 94V-0
TERMINAL:
PHOSPHOR BRONZE

520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

samtec

MADE BY: GREG REIDINGER 5-9-91
CHECKED BY: McCARTIN
APPROVAL: DEM

DWM-XX-XX-XX-X-XXX-XXX
SHEET 1 OF 1