
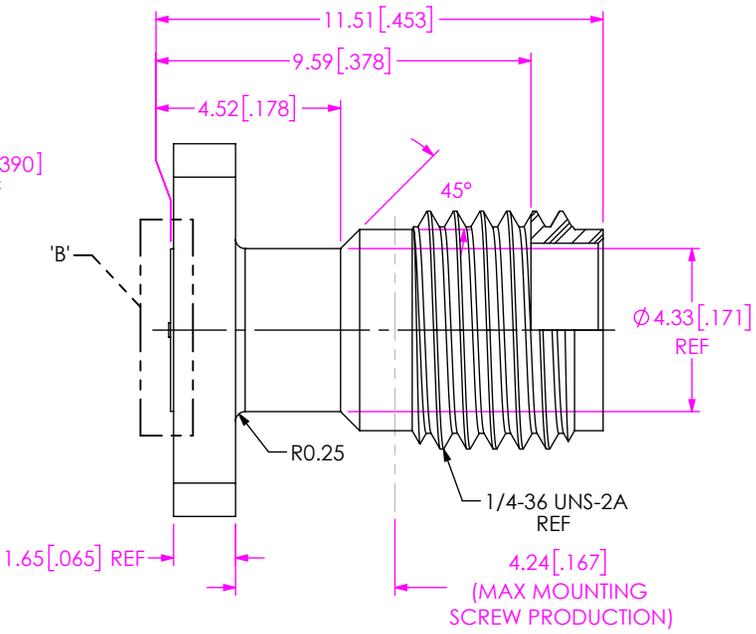
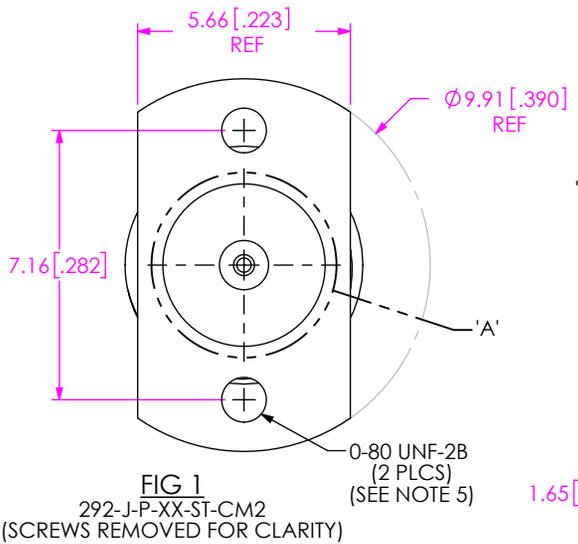


ITEM	COMPONENT	PART NUMBER	QUANTITY
1	SUB ASSEMBLY	SUB-292-J-P-HP-ST-CM2	1
2	SCREWS	292-SCR-01 (SEE NOTE 4)	2

DO NOT SCALE FROM THIS PRINT

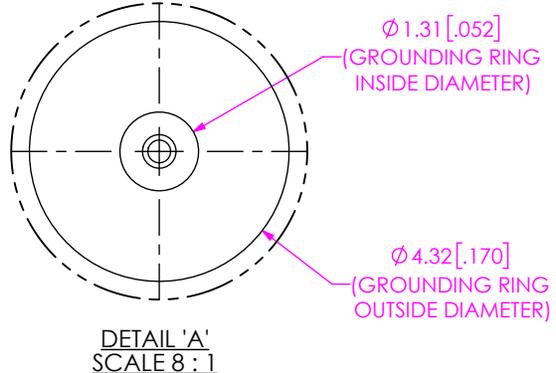

292-J-P-XX-ST-CM2

TERMINATION
-CM2: COMPRESSION MOUNT



ORIENTATION
-ST: STRAIGHT

PLATING SPECIFICATION
-HP: 30 μ " GOLD CENTER CONTACT,
PASSIVATED OUTER CONTACT

GENDER
-J: JACK

TYPE
-P: PCB

DESIGNED & DIMENSIONED
IN MILLIMETERS [INCHES]

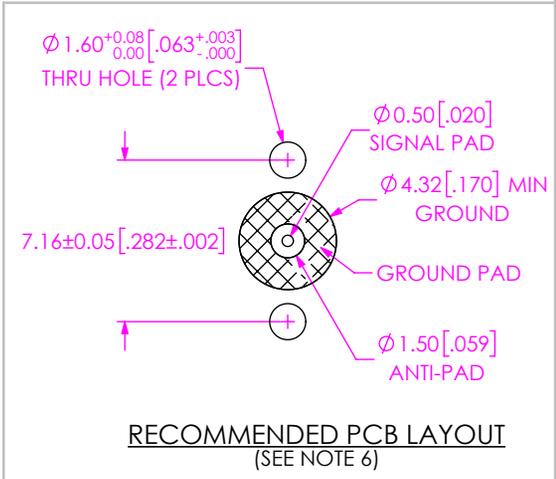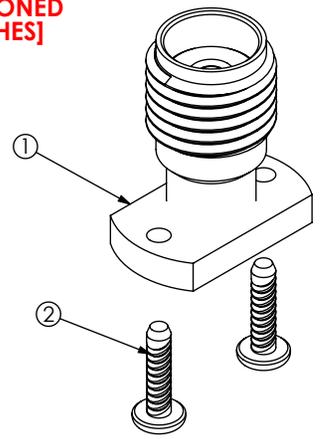

- NOTES:
- ⊕ REPRESENTS A CRITICAL DIMENSION.
 - PRODUCT TO BE PACKAGED PER PACKING STANDARD CO-RF-WI-3040-M.
TRAY: TY-SMA001-1
COVER: TY-SMA001-2
100 PARTS PER TRAY (1 PART PER POCKET)
 - CONTACT SAMTEC FOR SPECIFIC PAD LAYOUT BASED ON APPLICATION.
 - SCREWS TO BE PACKAGED SEPARATELY.
 - RECOMMENDED TORQUE 0.5~0.8 INCH-POUNDS.
 - THIS IS A GENERAL FOOTPRINT AND IS NOT OPTIMIZED FOR ELECTRICAL PERFORMANCE,
CONTACT SIG@SAMTEC.COM FOR ASSISTANCE WITH ELECTRICAL LAYOUT.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN
MILLIMETERS [INCHES].
TOLERANCES ARE:

DECIMALS	ANGLES
.X: ±0.3 [01]	5°
.XX: ±0.13 [005]	
.XXX: ±0.051 [0020]	

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND
PROPRIETARY INFORMATION AND ALL DESIGN,
MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS
AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC,
INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE
OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR
REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY
OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS
WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 5:1
SHELL: STAINLESS STEEL
SOCKET: BeCu
INSULATOR: NEOFロン



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code: 55322

DESCRIPTION:
292 ST JACK FOR COMPRESSION MOUNT

DWG. NO.
292-J-P-XX-ST-CM2

BY: ALVIN W 09/26/2012 SHEET 1 OF 1